

ESR-9750G is a 11N Gigabit Broadband Router that delivers up to 6x faster speeds and 3x extended coverage than 802.11g devices. ESR-9750G supports home network with superior throughput and performance and unparalleled wireless range. With easy to use on the WPS function, it helps users to connect to wireless device with just one push button.



There's also a built-in 4-port 10/100/1000 Gigabit switch to connect your wired-Ethernet devices together. The Router function ties it all together and lets your whole network shares a high-speed cable or DSL Internet connection.

Key Features

- Green Ethernet mode (Power saving up to 50%)
- Four Operation Mode support– AP / AP-Client / Universal Repeater / WDS
- QoS
- Speed and Bandwidth monitoring
- Firmware recovery
- Best channel selection

Package Content

- 1* 802.11n Gigabit Router (ESR-9750G)
- 1* 12V/1A Power Adapter
- 3* 2dBi 2.4GHz detachable Antennas
- 1*QIG
- 1*CD (User's Manual)

HARDWARE SPECIFICATION

Gigabit switch	Power saving RTL8366 (Green Ethernet)
Expansion Slots	N/A
PCB dimension	150mm * 100mm
Physical Interface	WAN: One 10/100/1000 Gigabit Ethernet RJ-45 LAN: Four 10/100/1000 Gigabit Ethernet RJ-45 Reset Button (5 second for reboot, 5~10 seconds for reset to factory default) Power Jack WPS push button (Wi-Fi Protected Setup)
LEDs Status	Power/ Status WAN (Internet connection)


* Theoretical wireless signal rate based on IEEE standard of 802.11a, b, g, n chipset used. Actual throughput may vary. Network conditions and environmental factors lower actual throughput rate.

** All specifications are subject to change without notice.


	LAN1~LAN4 (10/100/1000Mbps) WLAN (Wireless Connection)
Power Requirements	Power Supply: 200 to 240 VDC $\pm$ 10% (ETSI) 100 to 120 VDC $\pm$ 10% (FCC) Device: 12V/1A

Front Panel (LED status)

WAN	1 (Link-> blue on, traffic->blink)
LAN	4 (Link-> blue on, traffic->blink)
WLAN	1 (Link-> blue on, traffic->blink)
Power/Status	1 (On-> red Test/reset default->blink)

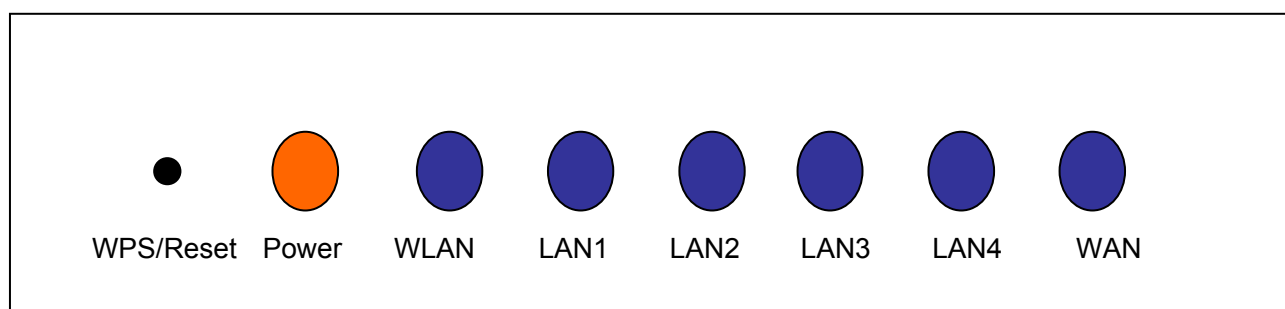

Rear Panel (Interface)

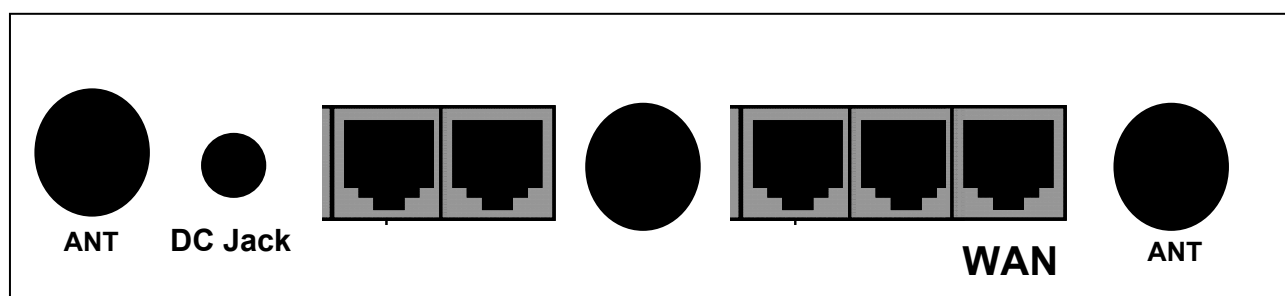

RF SPECIFICATION

Frequency Band	2.400 ~ 2.484 GHz
----------------	-------------------

* Theoretical wireless signal rate based on IEEE standard of 802.11a, b, g, n chipset used. Actual throughput may vary. Network conditions and environmental factors lower actual throughput rate.

** All specifications are subject to change without notice.

EnGenius Networks Singapore Pte Ltd

215 Henderson Road #01-04 Henderson Industrial Park Singapore 159554 Tel: (+65) 6227 1088 Fax: (+65) 6227 2766

Website: www.engeniustech.com.sg Email: inquiry@engeniustech.com.sg

Modulation Technology	OFDM: BPSK, QPSK, 16-QAM, 64-QAM DBPSK, DQPSK, CCK																																																																																									
Operating Channels	Operation Mode – AP / AP-Client / Universal Repeater / WDS Wireless Mode – 11b/ 11g /11n Channel Selection (Setting varies by Country) Channel Bandwidth (Auto, 20Mhz, 40Mhz) Transmission Rate -11g: Best. 54, 48, 36, 24, 18, 12, 11, 9, 6, 5.5, 2, 1 in Mbps <table><tr><th rowspan="2">MCS index</th><th colspan="2">Guard Interval 800ns</th><th colspan="2">Guard Interval 400ns</th></tr><tr><th>20MHz(Mbps)</th><th>40MHz(Mbps)</th><th>20MHz(Mbps)</th><th>40MHz(Mbps)</th></tr><tr><td>0</td><td>6.5</td><td>13.5</td><td>7.2</td><td>15</td></tr><tr><td>1</td><td>13</td><td>27</td><td>14.4</td><td>30</td></tr><tr><td>2</td><td>19.5</td><td>40.5</td><td>21.7</td><td>45</td></tr><tr><td>3</td><td>26</td><td>54</td><td>28.9</td><td>60</td></tr><tr><td>4</td><td>39</td><td>81</td><td>43.3</td><td>90</td></tr><tr><td>5</td><td>52</td><td>108</td><td>57.8</td><td>120</td></tr><tr><td>6</td><td>58.5</td><td>121.5</td><td>65</td><td>135</td></tr><tr><td>7</td><td>65</td><td>135</td><td>72.2</td><td>157.5</td></tr><tr><td>8</td><td>13</td><td>27</td><td>14.4</td><td>30</td></tr><tr><td>9</td><td>26</td><td>54</td><td>28.9</td><td>60</td></tr><tr><td>10</td><td>39</td><td>81</td><td>43.3</td><td>90</td></tr><tr><td>11</td><td>52</td><td>108</td><td>57.8</td><td>120</td></tr><tr><td>12</td><td>78</td><td>162</td><td>86.7</td><td>180</td></tr><tr><td>13</td><td>104</td><td>216</td><td>115.6</td><td>240</td></tr><tr><td>14</td><td>117</td><td>243</td><td>130</td><td>270</td></tr><tr><td>15</td><td>130</td><td>270</td><td>144.4</td><td>300</td></tr></table>	MCS index	Guard Interval 800ns		Guard Interval 400ns		20MHz(Mbps)	40MHz(Mbps)	20MHz(Mbps)	40MHz(Mbps)	0	6.5	13.5	7.2	15	1	13	27	14.4	30	2	19.5	40.5	21.7	45	3	26	54	28.9	60	4	39	81	43.3	90	5	52	108	57.8	120	6	58.5	121.5	65	135	7	65	135	72.2	157.5	8	13	27	14.4	30	9	26	54	28.9	60	10	39	81	43.3	90	11	52	108	57.8	120	12	78	162	86.7	180	13	104	216	115.6	240	14	117	243	130	270	15	130	270	144.4	300
MCS index	Guard Interval 800ns		Guard Interval 400ns																																																																																							
	20MHz(Mbps)	40MHz(Mbps)	20MHz(Mbps)	40MHz(Mbps)																																																																																						
0	6.5	13.5	7.2	15																																																																																						
1	13	27	14.4	30																																																																																						
2	19.5	40.5	21.7	45																																																																																						
3	26	54	28.9	60																																																																																						
4	39	81	43.3	90																																																																																						
5	52	108	57.8	120																																																																																						
6	58.5	121.5	65	135																																																																																						
7	65	135	72.2	157.5																																																																																						
8	13	27	14.4	30																																																																																						
9	26	54	28.9	60																																																																																						
10	39	81	43.3	90																																																																																						
11	52	108	57.8	120																																																																																						
12	78	162	86.7	180																																																																																						
13	104	216	115.6	240																																																																																						
14	117	243	130	270																																																																																						
15	130	270	144.4	300																																																																																						
Receive Sensitivity (Typical)	IEEE802.11n(3RX) - MCS0/8 @ -91dBm - MCS7/15@ -74dBm IEEE802.11g (3RX) 6Mbps@ -92dBm 54Mbps@ -75dBm IEEE802.11b (1RX) 1Mbps@ -93dBm 11Mbps@ -91dBm																																																																																									
Available transmit power	IEEE802.11N MCS 0~15@ >16dBm																																																																																									

* Theoretical wireless signal rate based on IEEE standard of 802.11a, b, g, n chipset used. Actual throughput may vary. Network conditions and environmental factors lower actual throughput rate.

** All specifications are subject to change without notice.

	IEEE802.11g 6~54 Mbps@ 16dBm IEEE802.11b 1, 11Mbps@ 19dBm
Antenna *2	Peak Gain = 2 dBi Average Gain = 1.08 dBi (@ 2.45GHz, H-Plan)

SOFTWARE SPECIFICATIONS

Router and Gateway

Topology	Infrastructure
Operation Mode	Router
LAN	DHCP Server Static Routing Table UPNP
WAN	PPTP PPPoE Static IP DHCP Client Clone MAC
Router	NAT/ NAPT Static Routing Dynamic Route Virtual server mapping IP address mapping Port Forwarding Port Triggering Special application ALG(Application Layer Gateway) support (RTP/RTSP, AOL, FTP, ICMP, WMP/MMS, NetMeeting, SIP) DNS Relay DDNS Time Zone(NTP client)
Firewall	Blocking Ping DoS(Blocking Ping, Port scan, Sync Flood) MAC / IP Filtering ICMP Blocking SPI (Stateful Packet Inspection) DMZ (Demilitarized Zone) Host Policy Based Parental Controls - Port Range / Service Filtering - Internet Domain Restriction

* Theoretical wireless signal rate based on IEEE standard of 802.11a, b, g, n chipset used. Actual throughput may vary. Network conditions and environmental factors lower actual throughput rate.

** All specifications are subject to change without notice.

	Dynamic URL Filtering (OEM subscription service)
VPN	VPN pass-through (PPTP, L2TP, IPSEC)
Wireless	Power saving 64/128 bit WEP Encryption WPA Personal (WPA-PSK using TKIP or AES) WPA Enterprise (WPA-EAP using TKIP) 802.1x Authenticator Hide SSID in beacons Wi-Fi Protection Setup (WPS) WDS ACL control
QoS	WMM Rule Based Controls(Protocol, IP, port range) Intelligent Stream Handling/Wireless Intelligent Stream Handling - Automatic Traffic Classification & Prioritization - Dynamic Traffic Shaping & Packet Fragmentation - Automatic Configuration

MANAGEMENT

Configuration	Web-based configuration (HTTP)
Firmware Upgrade	Upgrade firmware via web-browser
Administrator Setting	Administrator password change Idle time out
Reset Setting	Reboot Reset to Factory Default
System monitoring	Status and Statistics, Time Zone & NTP Client, Event Log,

ENVIRONMENT & PHYSICAL

Temperature Range	0 to 45° C - Operating, -10 to 70 ° C - Storage
Humidity (non-condensing)	15% ~ 95% typical
Dimensions	167mm (L) x 108mm (W) x 25mm (H)
Weight	275g

* Theoretical wireless signal rate based on IEEE standard of 802.11a, b, g, n chipset used. Actual throughput may vary. Network conditions and environmental factors lower actual throughput rate.

** All specifications are subject to change without notice.

EnGenius Networks Singapore Pte Ltd

215 Henderson Road #01-04 Henderson Industrial Park Singapore 159554 Tel:(+65) 6227 1088 Fax:(+65) 6227 2766

Website: www.engeniustech.com.sg Email: inquiry@engeniustech.com.sg